


Digital Clamp Meters

CHB 7(AC) & CHB 37 (AC & DC) TRUE RMS

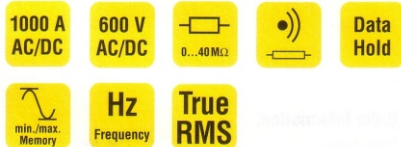

93470

Key Functions


- 🔌 Current, voltage and resistance measurement
- 🔌 Frequency measurement
- 🔌 Acoustical continuity test
- 🔌 Min/Max and relative value measurement

General Information

- 🔌 Automatic and manual selection of the measurement range
- 🔌 Integrated data hold
- 🔌 Additional analogue bargraph display
- 🔌 Clamp opening 44 mm
- 🔌 Auto-Power-Off

Technical Data

| | |
|------------------------|-------------------------------|
| Display: | 3 ¾ Digital, LCD, 3999 Digits |
| Measuring Ranges | |
| Current AC: | 0.1...1000 A |
| Tolerance: | ± (2.5 % rdg. + 10 Digit) |
| Current DC: | 0.1...1000 A |
| Tolerance: | ± (2.5 % rdg. + 5 Digit) |
| Voltage AC: | 1 mV...600 V |
| Tolerance: | ± (5 % rdg. + 5 Digit) |
| Voltage DC: | 0.1 mV...600 V |
| Tolerance: | ± (1 % rdg. + 2 Digit) |
| Input Resistance: | 10 MΩ |
| Resistance: | 0.1 Ω...40 MΩ |
| Tolerance: | ± (1.5 % rdg. + 3 Digit) |
| Continuity: | R<40 Ω |
| Frequency | |
| Measurement: | 0.01 Hz...800 kHz |
| Tolerance: | ± (0.1 % rdg. + 2 Digit) |
| Frequency Range for | |
| Current/Voltage AC: | 40...450 Hz |
| Crest Factor: | 1...10 |
| Measurement Category : | CAT III, 600 V |
| Pollution Degree: | 2 |
| Safety in compl. With: | IEC 61010, EN 61010 |
| Clamp Opening: | ø 46 mm |
| Power Supply: | 1 x 9 V, IEC 6LR61 |
| Dimensions: | 239 x 66 x 34 mm |
| Weight approx.: | 365 g |

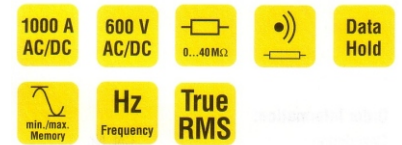

93480

Key Functions

- 🔌 Current, voltage and resistance measurement
- 🔌 Frequency measurement
- 🔌 Acoustic continuity test
- 🔌 Min/Max and relative value measurement

General Information


- 🔌 Automatic and manual selection of the measurement range
- 🔌 Integrated data hold
- 🔌 Additional analogue bargraph display
- 🔌 Clamp opening 46 mm
- 🔌 Auto-Power-Off

Special Features

- 🔌 True RMS Measurement
- 🔌 AC/DC current clamps are also appropriate for the use in automobile workshops, UPSs and solar technology

Technical Data

| | |
|------------------------|-------------------------------|
| Display: | 3 ¾ Digital, LCD, 3999 Digits |
| Measuring Ranges | |
| Current AC: | 0.1...1000 A |
| Tolerance: | ± (2.5 % rdg. + 10 Digit) |
| Current DC: | 0.1...1000 A |
| Tolerance: | ± (2.5 % rdg. + 5 Digit) |
| Voltage AC: | 1 mV...600 V |
| Tolerance: | ± (5 % rdg. + 5 Digit) |
| Voltage DC: | 0.1 mV...600 V |
| Tolerance: | ± (1 % rdg. + 2 Digit) |
| Input Resistance: | 10 MΩ |
| Resistance: | 0.1 Ω...40 MΩ |
| Tolerance: | ± (1.5 % rdg. + 3 Digit) |
| Continuity: | R<40 Ω |
| Frequency | |
| Measurement: | 0.01 Hz...800 kHz |
| Tolerance: | ± (0.1 % rdg. + 2 Digit) |
| Frequency Range for | |
| Current/Voltage AC: | 40...450 Hz |
| Crest Factor: | 1...10 |
| Measurement Category : | CAT III, 600 V |
| Pollution Degree: | 2 |
| Safety in compl. With: | IEC 61010, EN 61010 |
| Clamp Opening: | ø 46 mm |
| Power Supply: | 1 x 9 V, IEC 6LR61 |
| Dimensions: | 239 x 66 x 34 mm |
| Weight approx.: | 365 g |



Vaiseshika Electron Devices
38, Industrial Estate, Ambala Cantt-133 001
Phone: (171) - 2699827, 2699891, Fax: 2699773
Email: vaiseshika@gmail.com

